

Field Master Pro™ MS2090A 9 kHz to 9/14/20/26.5/32/44/54 GHz

High-Performance Spectrum Analyzer

Anritsu's Field Master Pro MS2090A RF spectrum analyzer delivers performance never previously available in a compact, handheld instrument. With continuous frequency coverage from 9 kHz to 54 GHz, the Field Master Pro MS2090A is specifically designed to meet the challenges of 5G test while maintaining support for a full range of other wireless technologies in use today, including: wireless backhaul, aerospace/defense, satellite systems, and radar.

The Field Master Pro MS2090A delivers the highest levels of RF performance available in a handheld, touchscreen spectrum analyzer, with a displayed average noise level (DANL) of -164 dBm and Third Order Intercept (TOI) of +20 dBm (typical). This makes measurements such as spectrum clearing, radio alignment, harmonic, and distortion even more accurate than previously possible. For modulation measurements on digital systems, 100 MHz modulation bandwidth coupled with best-in-class phase noise performance maximizes measurement precision, while ± 0.5 dB typical amplitude accuracy provides confidence when testing transmitter power and spurious.


Ruggedized for field use, all versions provide a comprehensive range of features to speed and simplify measurement as well as enhance usability. RTSA spans of up to 100 MHz (optional) provide capability for cellular interference monitoring to full ISM band signal analysis. In addition to being a full span swept-tuned spectrum analyzer, all versions include a spectrogram display that helps monitor the RF spectrum for intermittent or interfering signals. Integrated channel power and occupied bandwidth measurements simplify the measuring and characterizing of common radio transmission.

Field Master Pro MS2090A Highlights

- 9 kHz to 9/14/20/26.5/32/44/54 GHz
- DANL: -164 dBm (with preamp)
- TOI: +20 dBm (typical)
- Analysis bandwidth: up to 100 MHz
- Amp range: DANL to +30 dBm
- Phase noise at 1 GHz: -110 dBc/Hz @ 100 kHz offset (typical)
- Demodulation: 5GNR, modulation quality with SSB signal analysis
- Resolution bandwidth (RBW): 1 Hz to 10 MHz
- RTSA bandwidth: 20 MHz to 100 MHz
- Amplitude accuracy at < 14 GHz: ± 1.3 dB (± 0.5 dB, typical)



Field Master Pro MS2090A

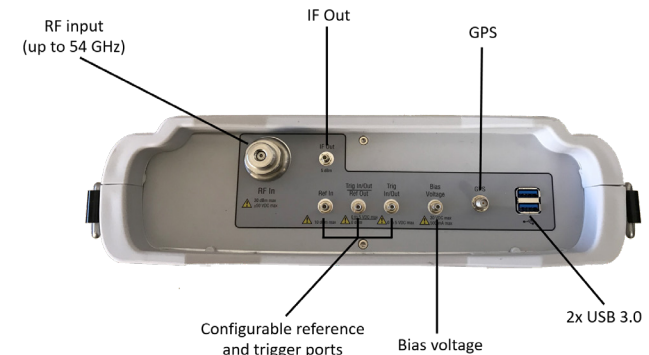

- USB 3.0/USB Type C for external devices
- Ethernet for remote operation
- PCI for high-speed data streaming (future application)
- Aux headphone jack



Quick Fact Sheet

Field Master Pro MS2090A

9 kHz to 9/14/20/26.5/32/44/54 GHz



Key Specifications

Performance	
Frequency Range	MS2090A-0709 - 9 kHz to 9 GHz MS2090A-0714 - 9 kHz to 14 GHz MS2090A-0720 - 9 kHz to 20 GHz MS2090A-0726 - 9 kHz to 26.5 GHz MS2090A-0732 - 9 kHz to 32 GHz MS2090A-0744 - 9 kHz to 44 GHz* MS2090A-0754 - 9 kHz to 54 GHz*
DANL (w/preamp)	-164 dBm
TOI	+20 dBm
Analysis bandwidth	Up to 100 MHz
Demodulation	5G NR SSB measurements (RSRP, RSRQ, SINR, EVM)
Amp range	DANL to +30 dBm
Phase noise at 1 GHz	-110 dBc/Hz @ 100 kHz offset (typical)
Resolution bandwidth (RBW)	1 Hz to 10 MHz with 0.1 Hz resolution
Input SWR	1.5
Amplitude accuracy	< 14 GHz ±1.3 dB (±0.5 dB, typical)
RTSA bandwidth	20 MHz, 50 MHz, or 100 MHz

Key Features

Feature	Specification
Display	10.1 in, 1280 x 800 color capacitive touchscreen
Traces	6
Detectors	Avg/RMS, Peak, Negative
Gated sweep	For time gated spectrum measurements
Markers	12 markers assignable to any trace
Limit lines	Complex limit lines with Pass/Fail
5G waveform IQ capture	Capture and export
Connectivity	802.11 and Bluetooth
GNSS	GPS and GLONASS
Interfaces	USB 3.0 PCIe, Ethernet
Battery life	2 hours (function dependent)
Size	314 mm x 235 mm x 95 mm (12.4 in x 9.25 in x 3.74 in)
Weight	MS2090A-0709, -0714, -0720: 5.06 kg (11.15 lb) MS2090A-0726, -0732, -0744, -0754: 5.4 kg (11.9 lb)

Standard Accessories

Part Number	Description
2000-1371-R	Ethernet cable, 7ft/213 cm
2000-1931-R	Stylus
3-2000-1928	Shoulder strap
3-82807-2	Touchscreen protective film
633-75	Li-Ion Battery
40-204-R	AC/DC power supply (Field Master™ series)
2000-1859-R	USB cable, USB 3.0 Type-A to Type-C, 1m
2000-1938-R	SMB plug to BNC jack adapter
806-366-R	BNC to SMB cable, 1 m
	Certificate of Calibration and Conformance

Instrument Options

Model Number	Description
MS2090A-0031	GPS Receiver (Requires GPS Antenna, sold separately) - 2000-1528-R GPS Antenna, SMA(m) with 5 m (15 ft) cable, requires 5 VDC - 2000-1652-R GPS Antenna, SMA(m) with 0.3 m (1 ft) cable, requires 3.3 or 5 VDC - 2000-1760-R GPS antenna, SMA(m) with no cable, 2.5 to 3.7 VDC
MS2090A-0103	50 MHz analysis bandwidth (for MS2090A 9, 14, 20, or 26.5 GHz units only)
MS2090A-0104	100 MHz analysis bandwidth (for MS2090A 9, 14, 20, or 26.5 GHz units only)
MS2090A-0105*	50 MHz analysis bandwidth (for MS2090A 32, 44, or 54 GHz units only)
MS2090A-0106*	100 MHz analysis bandwidth (for MS2090A 32, 44, or 54 GHz units only)
MS2090A-0199	Real-time spectrum analyzer
MS2090A-0888	5G NR downlink measurements (requires Option 31)
MS2090A-xxxx-0097	Accredited calibration to ISO17025 and ANSI/NCSL Z540-1 (xxxx is the frequency option number)
MS2090A-xxxx-0098	Standard calibration to ISO17025 and ANSI/NCSL Z540-1 (xxxx is the frequency option number)
MS2090A-xxxx-0099	Premium calibration to ISO17025 and ANSI/NCSL Z540-1 plus test data (xxxx is the frequency option number)

* These options have an ECCN code of 3A002 and are controlled items that may require an export license.

Pricing | Ordering | Support

www.anritsu.com